
# Framing Information: 60HH Front (Double Glass)



# Framing Dimensions

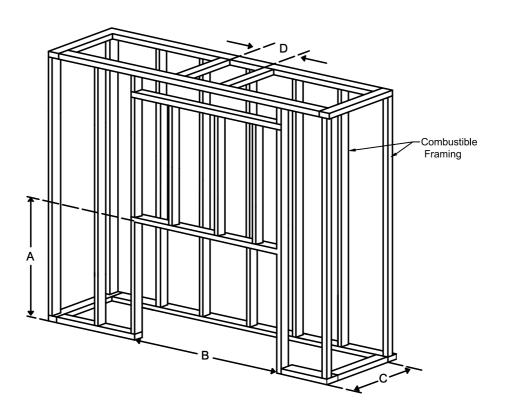

Model	А	В	С	D
60HH Front	49 ½"	69 ½"		Refer to Vent Manufacturer's Firestop Dimensions

Note: 1. Drawings are not to Scale

2. All dimensions in inches

3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE

SELF-SUPPORTED.

# Framing Information: 60HH Front (Double Glass) Framing Details Nailing flanges fold up and connect to the framing. ALL FRAMING MUST BE SELF-SUPPORTED. The fireplace must not bear any weight. Heat Release Heat Release 5/8" Type X —— Drywall on Framing Exterior 5/8" Type X Drywall on Framing Exterior Combustible Framing ..%6 Air Intake Elevation View Section View (required for double glass only) Add drywall nailer as needed. The valve can be moved 36" from the center Top View of the fireplace in any direction

Note: 1. Drawings are not to Scale

2. All dimensions in inches


3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.


Page 2 of 3


# Framing Information: 60HH Front (Double Glass)




# **Fireplace Dimensions**

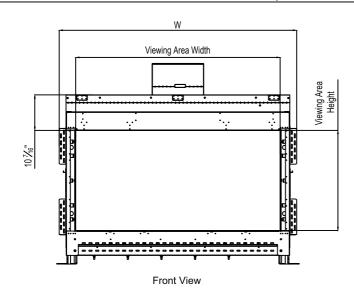

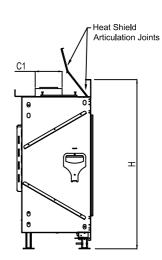

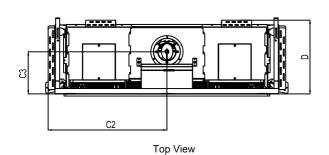

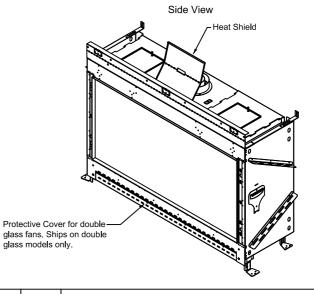

Model	(H) Height	(W) Width	(D) Depth	C1	C2	C3	Viewing Area	
							Front	Side
60HH Front	49 ½"	69 ½"	21 %"	7 %"	34 ¾"	12 ½ <sub>6</sub> "	59 <sup>13</sup> / <sub>16</sub> " W X 29 ½" H	_

Note: 1. Drawings are not to Scale

2. All dimensions in inches