
Framing Information: 25H Three Sided (TS) (Screen & Double Glass)



Framing Dimensions

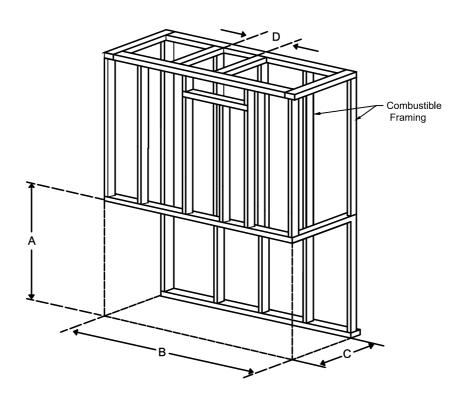

Model	А	В	С	D	
25H TS	43 %" 30 1½		25 ½"	Refer to Vent Manufacturer's Firestop Dimensions	

Note: 1. Drawings are not to Scale

2. All dimensions in inches

3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE

SELF-SUPPORTED.

Framing Information: 25H Three Sided (TS) (Screen & Double Glass) YOUR LIFE. YOUR FIRE Framing Details Nailing flanges fold up and connect to the framing. ALL FRAMING MUST BE SELF-SUPPORTED. The fireplace must not bear any weight. Heat Release Heat Releas 5/8" Type X—— Drywall on Framing Exterior 5/8" Type X Drywall on Framing Exterior Combustible Framing _____ **Elevation View** Section View Add drywall nailer as needed. (required for double glass only) The valve can be moved 36" from the center Top View of the fireplace in any direction

Note: 1. Drawings are not to Scale

2. All dimensions in inches


3. No weight can be transferred to the fireplace. ALL FRAMING MUST BE SELF-SUPPORTED.


Page 2 of 3

Framing Information: 25H Three Sided (TS) (Screen & Double Glass)



Fireplace Dimensions







Heat Shield

Articulation Joints

Side View





Model	(H) Height	(W) Width	(D) Depth	C1	C2	C3	Viewing Area	
							Front	Side
25H TS	43 %"	30 ¹ ½ ₆ "	25 1/8"	6 ¾ ₆ "	15 ½6"	15 %"	29 ¼" W X 23 ¹³ ⁄ ₁₆ " H	19 %" W X 23 ¹³ / ₁₆ " H

Note: 1. Drawings are not to Scale

2. All dimensions in inches